


LAKEWOOD 15220 SERIES FASTENER REQUIREMENTS

Ford 351M, 400, 429 & 460

For this product to meet SFI specification 6.1 the fasteners listed below must be used.

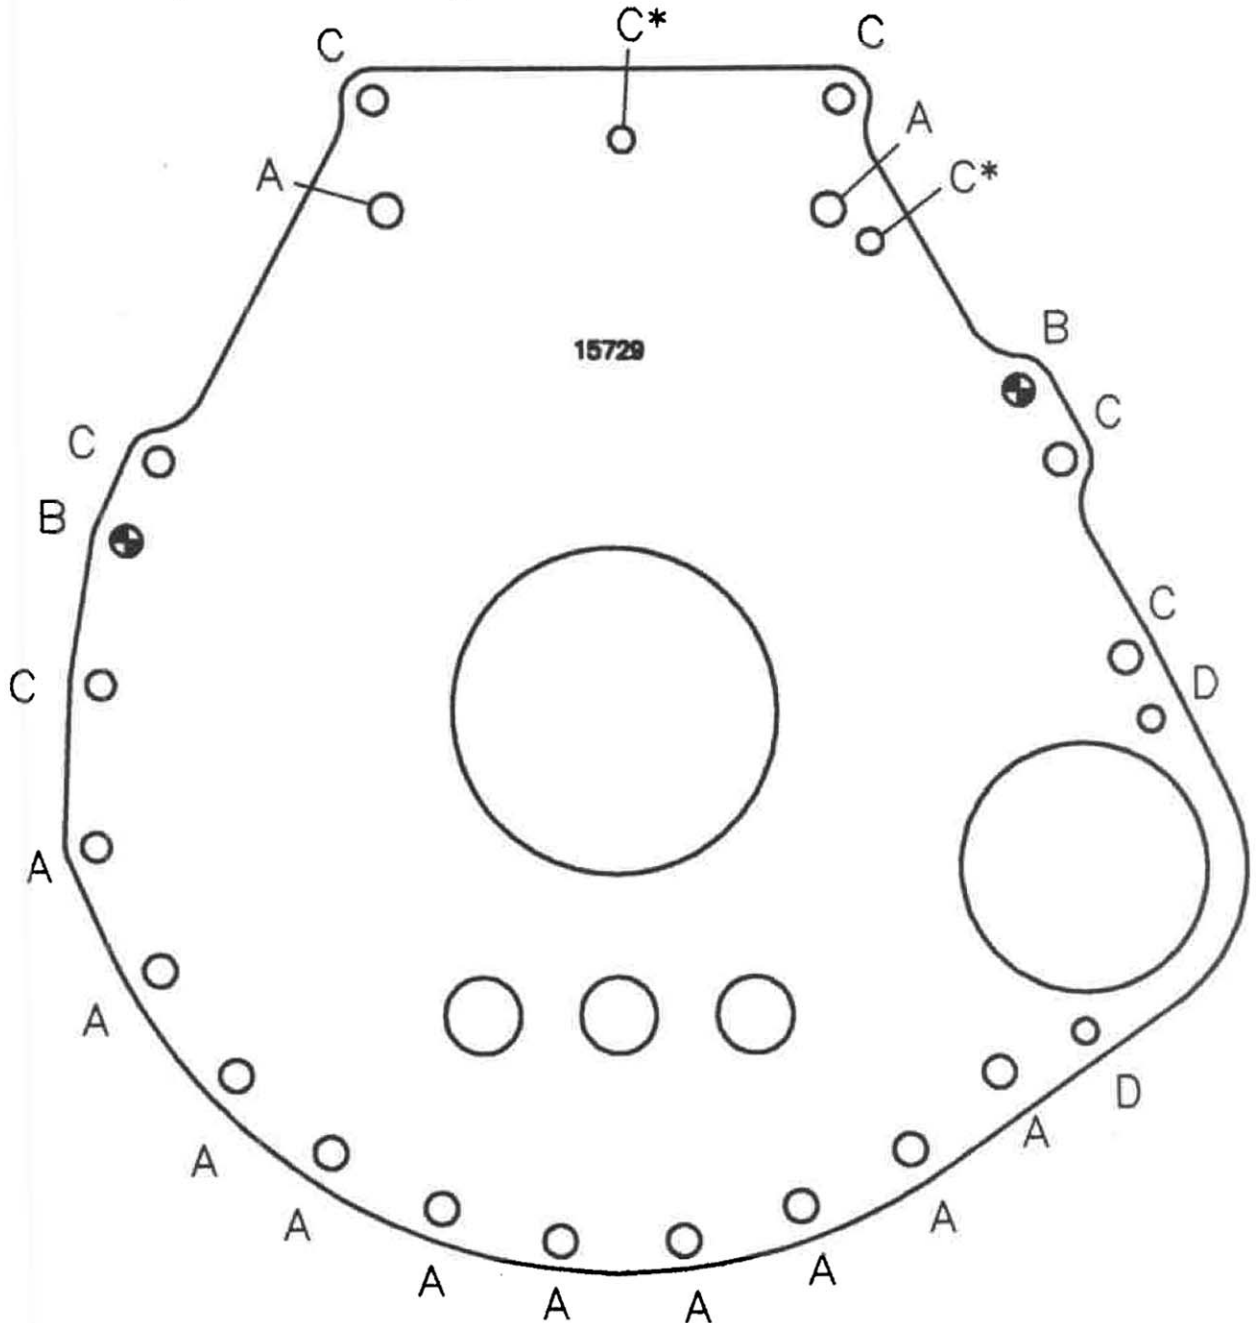

A = 1/2-13 X 1" GRADE 8 BOLTS, WASHERS & NUTS.

B = BELLHOUSING LOCATING PINS (NOT INCLUDED)

C = 7/16-14 X 1" GRADE 8 CAP SCREWS.

D = GRADE 5 STARTER BOLTS.

*** These holes may not be present in some blocks. If present, their use is recommended for additional safety.**